

Ball Transfer Unit A7124-16

Ball Units Series A7 - Wheel S/2

 -30 °C - +100 °C


swivels easily


wear resistant


shock proof


floor protective




weather proof

Wheel

Ball: carbon steel or stainless steel

Units are machined using CNC machines
from one piece of steel

Hevi-Load units run on the re-circulating ball principle
The load ball rotates on a hardened bed of small balls

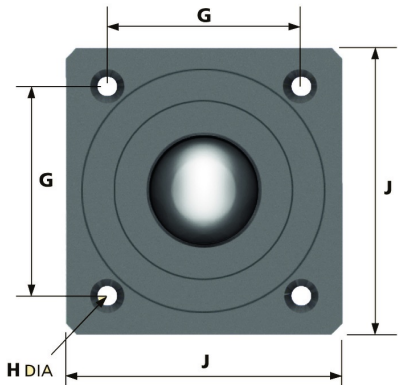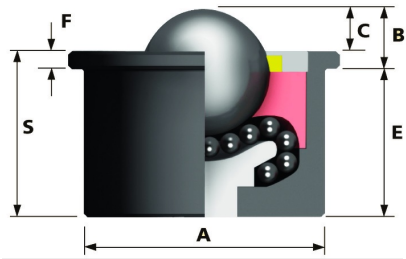

Ball Transfer Unit

Series: 2

Ball-Ø mm: 25,4

Finish housing: steel

Finish Balls: stainless steel

Load Capacity kg: 135

Load capacity tested according to EN 12530 and EN 12527

A mm: 44,5

B mm: 10,3

C mm: 5,6

E mm: 31,3



F mm: 4,7


G mm: 44,5

H mm: 5,6

J mm: 57,2

S mm: 36

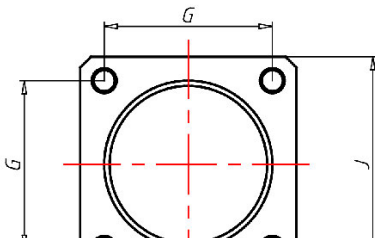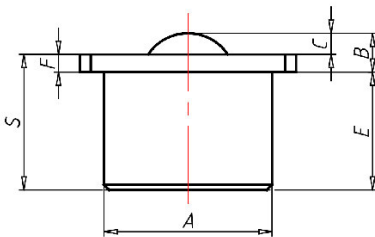

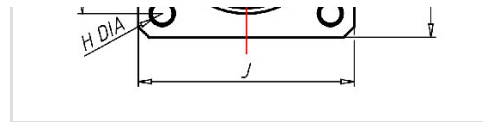

Advantages

- ✓ Casing made of solid steel on the lathe
- ✓ units run on the re-circulating ball principle
- ✓ The load ball rotates on a hardened bed of small balls
- ✓ top plate with four fixing holes

©Copyright 2024 Rollenbau GmbH, www.rollenbau.at 03.05.2024

Applications

- Haulage way
- Assembly lines