

Ball Transfer Unit A7125-16

Ball Units Series A7 - Wheel S/2

 -30 °C - +100 °C


swivels easily


wear resistant


shock proof


floor protective



weather proof

Wheel

Ball: carbon steel or stainless steel

Units are machined using CNC machines
from one piece of steel

Hevi-Load units run on the re-circulating ball principle
The load ball rotates on a hardened bed of small balls

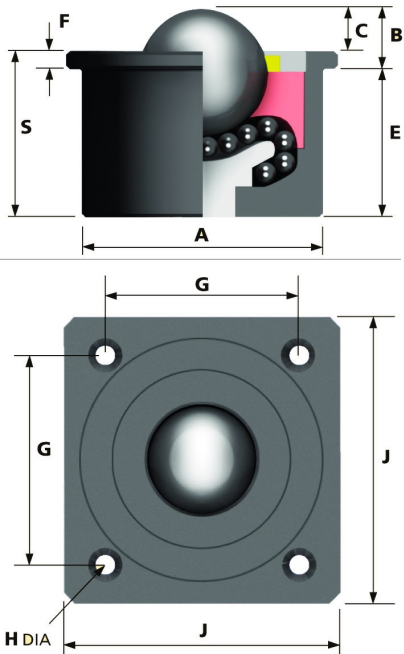

Ball Transfer Unit

Series: 2

Ball-Ø mm: 25,4

Finish housing: steel

Finish Balls: stainless steel

Load Capacity kg: 215

Load capacity tested according to EN 12530 and EN 12527

A mm: 50,8

B mm: 13

C mm: 6,1

E mm: 32


F mm: 6,9


G mm: 57,9

H mm: 7,1

J mm: 76,2

S mm: 38,9

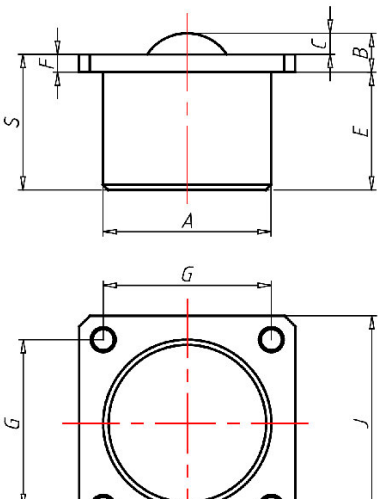

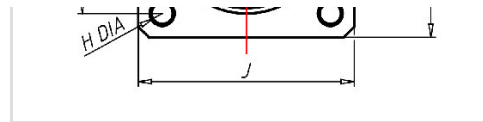

Advantages

- ✓ Casing made of solid steel on the lathe
- ✓ units run on the re-circulating ball principle
- ✓ The load ball rotates on a hardened bed of small balls
- ✓ top plate with four fixing holes

©Copyright 2024 Rollenbau GmbH, www.rollenbau.at 29.04.2024

Applications

- Haulage way
- Assembly lines