

Ball Transfer Unit A810-15-13

Ball Units Series A8 - Wheel S/810



-30 °C - +70 °C

swivels easily

wear resistant



shock proof

floor protective

weather proof

Wheel

Ball: zinc-plated or stainless steel
Housing, zinc-plated or stainless steel

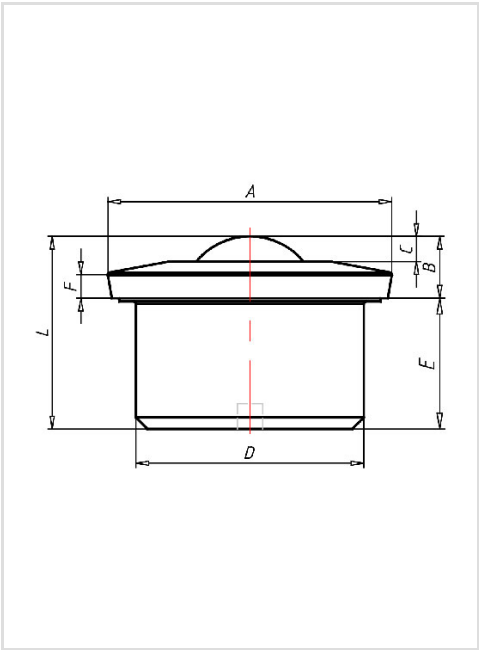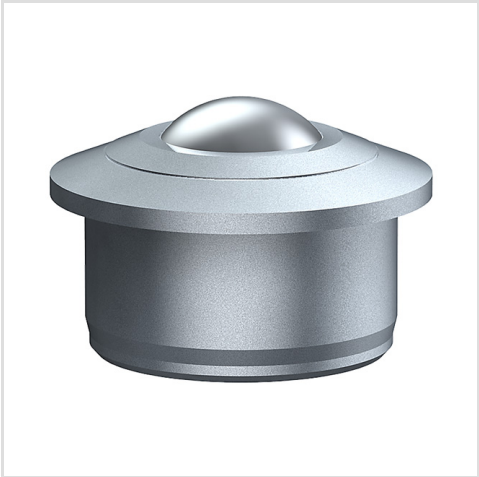

Ball Transfer Unit	
Series:	810
Ball-Ø mm:	15
Finish housing:	steel zinc plated
Finish Balls:	carbon-steel
Load Capacity kg:	56
Load capacity tested according to EN 12530 and EN 12527	
A mm:	31
B mm:	9,5
C mm:	4
D mm:	24
E mm:	11,5
F mm:	3,8
L mm:	21,0

Advantages

- ✓ Casing made of solid steel on the lathe
- ✓ High load capacity
- ✓ Low profile
- ✓ Coned outer ring.

©Copyright 2024 Rollenbau GmbH, www.rollenbau.at 08.05.2024

Applications

- Haulage way
- Assembly lines