

Ball Transfer Unit A810-22-13

Ball Units Series A8 - Wheel S/810



 -30 °C - +70 °C

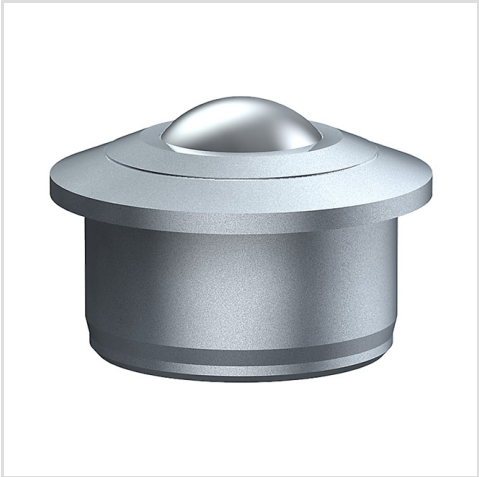

swivels easily


wear resistant


shock proof

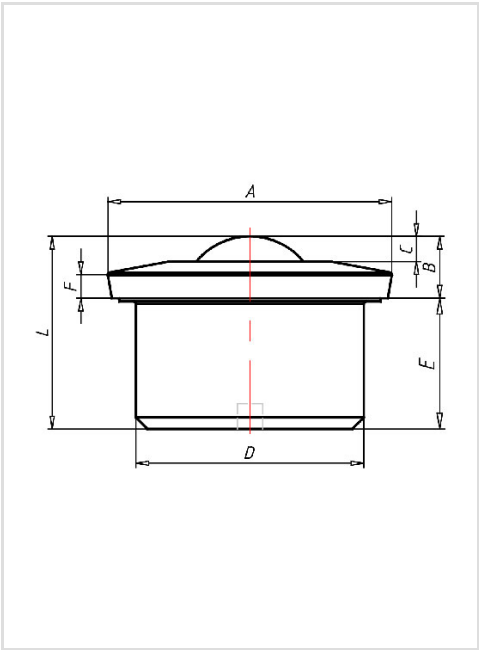

floor protective


weather proof



Wheel

Ball: zinc-plated or stainless steel
Housing, zinc-plated or stainless steel



Ball Transfer Unit	
Series:	810
Ball-Ø mm:	22
Finish housing:	steel zinc plated
Finish Balls:	carbon-steel
Load Capacity kg:	180
Load capacity tested according to EN 12530 and EN 12527	
A mm:	45
B mm:	9,8
C mm:	4
D mm:	36
E mm:	20,7
F mm:	4
L mm:	30,5

Advantages

- ✓ Casing made of solid steel on the lathe
- ✓ High load capacity
- ✓ Low profile
- ✓ Coned outer ring.

©Copyright 2024 Rollenbau GmbH, www.rollenbau.at 09.05.2024

Applications

- Haulage way
- Assembly lines