Fixed castor EDDF 160 EEK

Extra Heavy Duty Series EDD - Wheel E

-30 °C - +80 °C



Wheel



Tread: Elastic solid rubber tyre, black, 73±5 Shore A, vulcanised on wheel centre

Wheel centre: Die-cast aluminium alloy

Fork



For applications where a super strong and durable caster is required,

one tapered roller and one axial ball bearing, dust protection ring, very strong integrated Kingpin, locked nut, grease nipple, wheel axle bolted,

finish - painted

Fixed castor Wheel-Ø A x width B mm: 160x50+50

Load Capacity kg: 600

Load capacity tested according to EN 12530 and EN 12527

Overall height H mm: 215

Dimension of top plate TP 200x160

mm:

Hole spacing HS mm: 160x120

Hole-Ø HD mm: 15

Wheel bearing: Ball bearing


Advantages

- excellent running performance
- very silent in motion
- ✓ low rolling resistance
- good abrasion resistance
- corrosion resistant
- non-marking in grey

©Copyright 2024 Rollenbau GmbH, www.rollenbau.at 20.05.2024





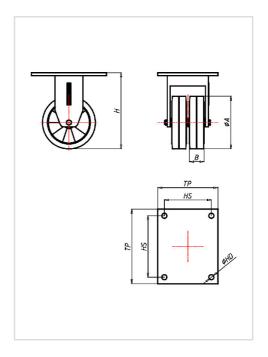

Applications

- Metal-Technology
- Heavy duty dollies
- Trash container trucks
- Machinery moving dollies
- Workshops
- Racks
- Building-Industry