Product data sheet Fixed castor EDDF 200 ESK

Extra Heavy Duty Series EDD - Wheel ES

-30 °C - +80 °C



Wheel



Tread: vulcanized elastic solid rubber tyre 73±5 Shore A

Wheel Center: Strong steel welded construction - zinc plated



For applications where a super strong and durable caster is required, one tapered roller and one axial ball bearing, dust protection ring, very strong integrated Kingpin, locked nut, grease nipple, wheel axle bolted, finish – painted

Fixed castor	Wheel-Ø A x width B mm: 200x100
Load Capacity kg:	800
Load capacity tested according to EN 12530 and EN 12527	
Overall height H mm:	270
Dimension of top plate TP	255x205
mm:	
Hole spacing HS mm:	210x160
Hole-Ø HD mm:	17
Wheel bearing:	Ball bearing


Advantages

- excellent running performance
- Iow rolling resistance
- silent in motion
- high abrasion resistance
- high load capacity

©Copyright 2024 Rollenbau GmbH, www.rollenbau.at 20.05.2024

⊙ | ROLLENBAU



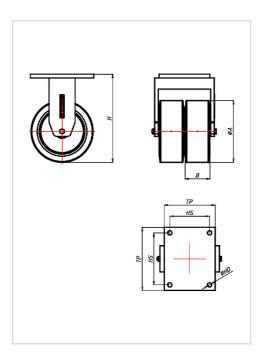

Applications

- Heavy duty dollies
- Trash container trucks
- Machinery moving dollies
- Racks