

# Swivel castor EDD 300 EEK

Extra Heavy Duty Series EDD - Wheel E

-30 °C - +80 °C

+++  
swivels easily

++  
wear resistant

+++  
shock proof

+++  
floor protective

++  
weather proof

## Wheel



Tread: Elastic solid rubber tyre, black, 73±5 Shore A, vulcanised on wheel centre

Wheel centre: Die-cast aluminium alloy

## Fork



For applications where a super strong and durable caster is required,  
one tapered roller and one axial ball bearing,  
dust protection ring,  
very strong integrated Kingpin,  
locked nut, grease nipple, wheel axle bolted,  
finish – painted


|                                                         |                                   |
|---------------------------------------------------------|-----------------------------------|
| Swivel castor                                           | Wheel-Ø A x width B mm: 300x60+60 |
| Load Capacity kg:                                       | 1400                              |
| Load capacity tested according to EN 12530 and EN 12527 |                                   |
| Overall height H mm:                                    | 380                               |
| Dimension of top plate TP mm:                           | 255x205                           |
| Hole spacing HS mm:                                     | 210x160                           |
| Hole-Ø HD mm:                                           | 17                                |
| Swivel radius SR mm:                                    | 247                               |
| Wheel bearing:                                          | Ball bearing                      |

## Advantages

- ✓ excellent running performance
- ✓ very silent in motion
- ✓ low rolling resistance
- ✓ good abrasion resistance
- ✓ corrosion resistant
- ✓ non-marking in grey

©Copyright 2024 Rollenbau GmbH, www.rollenbau.at 20.05.2024

ROLLENBAU

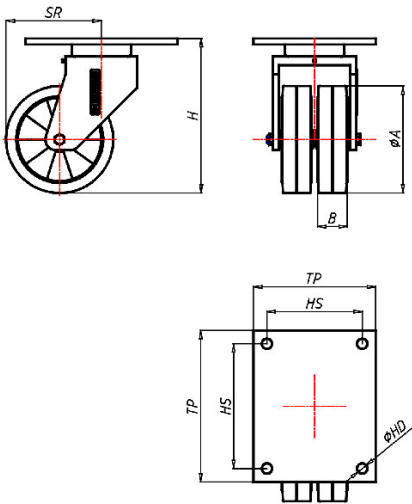

## Applications

- Metal-Technology
- Heavy duty dollies
- Trash container trucks
- Machinery moving dollies
- Workshops
- Racks
- Building-Industry