

Swivel castor EDD 400 EESK

Extra Heavy Duty Series EDD - Wheel ES

 -30 °C - +80 °C

+++
swivels easily

++
wear resistant

+++
shock proof

+++
floor protective

++
weather proof

Wheel



Tread: vulcanized elastic solid rubber tyre 73±5 Shore A

Wheel Center: Strong steel welded construction - zinc plated

Fork




For applications where a super strong and durable caster is required,
one tapered roller and one axial ball bearing,
dust protection ring,
very strong integrated Kingpin,
locked nut, grease nipple, wheel axle bolted,
finish – painted

Swivel castor	Wheel-Ø A x width B mm: 400x100+100
Load Capacity kg:	2000
Load capacity tested according to EN 12530 and EN 12527	
Overall height H mm:	564
Dimension of top plate TP mm:	255x205
Hole spacing HS mm:	210x160
Hole-Ø HD mm:	21
Swivel radius SR mm:	307
Wheel bearing:	Ball bearing

Advantages

- ✓ excellent running performance
- ✓ low rolling resistance
- ✓ silent in motion
- ✓ high abrasion resistance
- ✓ high load capacity

©Copyright 2024 Rollenbau GmbH, www.rollenbau.at 20.05.2024

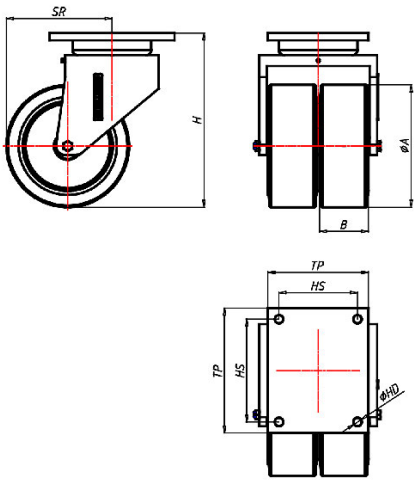

Applications

- Heavy duty dollies
- Trash container trucks
- Machinery moving dollies
- Racks