

Swivel castor with total lock QDT 127 ZK

Extra Heavy Duty Series QD - Wheel Z

 -30 °C - +80 °C

-  swivels easily
-  wear resistant
-  shock proof
-  floor protective
-  weather proof

Wheel



Tread: Cast polyurethane, 95±3 Shore A

Wheel centre, Cast-iron - painted

Fork




Pressed steel welded construction, with axial ball bearing and tapered roller bearing, dust protection ring, very strong integrated Kingpin, grease nipple, wheel axle with self-locking nut finish: zinc plated

Swivel castor with total lock Wheel-Ø A x width B mm: 125x50	
Load Capacity kg:	480
Load capacity tested according to EN 12530 and EN 12527	
Overall height H mm:	177
Dimension of top plate TP mm:	150x110
Hole spacing HS mm:	105x80/121x59
Hole-Ø HD mm:	12,5
Swivel radius SR mm:	125
Wheel bearing:	Ball bearing

Advantages

-  silent in motion
-  low rolling resistance
-  high abrasion and tear resistance
-  high resistance to shocks
-  good chemical resistance

©Copyright 2024 Rollenbau GmbH, www.rollenbau.at 20.05.2024

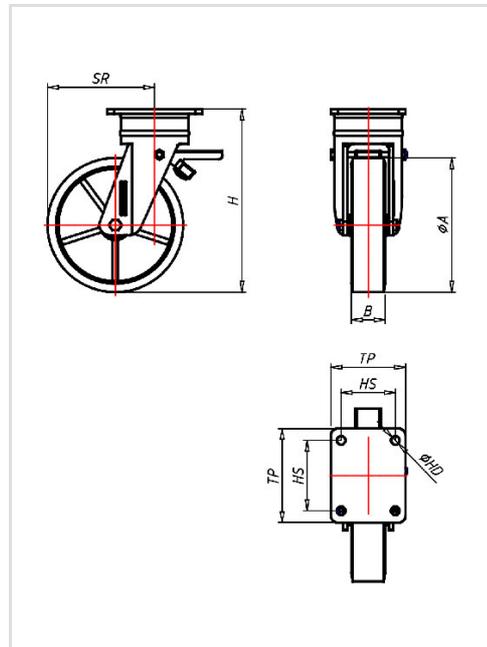

Applications

- Heavy duty dollies
- Trash container trucks
- Machinery moving dollies
- Racks