

Swivel castor with total lock QDT 151 ZK

Extra Heavy Duty Series QD - Wheel Z

-30 °C - +80 °C

- +++

swivels easily
- +++

wear resistant
- +++

shock proof
- +++

floor protective
- +++

weather proof

Wheel



Tread: Cast polyurethane, 95±3 Shore A

Wheel centre, Cast-iron - painted

Fork



Pressed steel welded construction,
with axial ball bearing and tapered roller bearing,
dust protection ring,
very strong integrated Kingpin,
grease nipple,
wheel axle with self-locking nut finish: zinc plated

Swivel castor with total lock Wheel-Ø A x width B mm: 150x50

Load Capacity kg: 700

Load capacity tested according to EN 12530 and EN 12527

Overall height H mm: 200

Dimension of top plate TP 150x110 mm:

Hole spacing HS mm: 105x80/121x59

Hole-Ø HD mm: 12,5

Swivel radius SR mm: 125


Wheel bearing: Ball bearing

Advantages

- ✓ silent in motion
- ✓ low rolling resistance
- ✓ high abrasion and tear resistance
- ✓ high resistance to shocks
- ✓ good chemical resistance

©Copyright 2024 Rollenbau GmbH, www.rollenbau.at 20.05.2024

ROLLENBAU

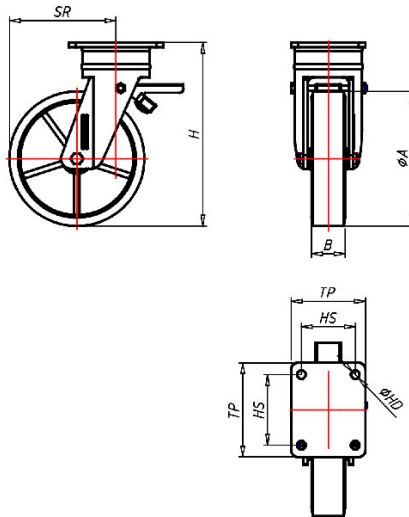

Applications

- Heavy duty dollies
- Trash container trucks
- Machinery moving dollies
- Racks