

Swivel castor QD 200 ZK

Extra Heavy Duty Series QD - Wheel Z

-30 °C - +80 °C

+++
swivels easily

+++
wear resistant

+++
shock proof

+++
floor protective

+++
weather proof

Wheel



Tread: Cast polyurethane, 95±3 Shore A

Wheel centre, Cast-iron - painted

Fork




Pressed steel welded construction,
with axial ball bearing and tapered roller bearing,
dust protection ring,
very strong integrated Kingpin,
grease nipple,
wheel axle with self-locking nut finish: zinc plated

Swivel castor	Wheel-Ø A x width B mm: 200x50
Load Capacity kg:	1000
Load capacity tested according to EN 12530 and EN 12527	
Overall height H mm:	250
Dimension of top plate TP mm:	150x110
Hole spacing HS mm:	105x80/121x59
Hole-Ø HD mm:	12,5
Swivel radius SR mm:	160
Wheel bearing:	Ball bearing

Advantages

- ✓ silent in motion
- ✓ low rolling resistance
- ✓ high abrasion and tear resistance
- ✓ high resistance to shocks
- ✓ good chemical resistance

©Copyright 2024 Rollenbau GmbH, www.rollenbau.at 20.05.2024

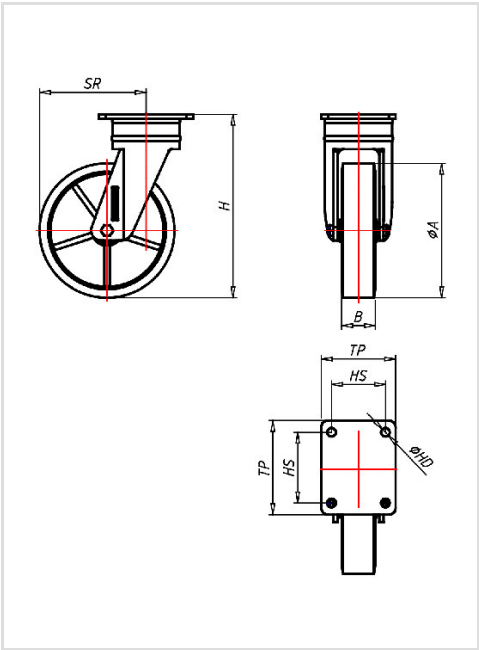

Applications

- Heavy duty dollies
- Trash container trucks
- Machinery moving dollies
- Racks