

Wheel RZ 80x50 K25

Forklift wheels Series RZ

 -20 °C - +80 °C


swivels easily


wear resistant


shock proof

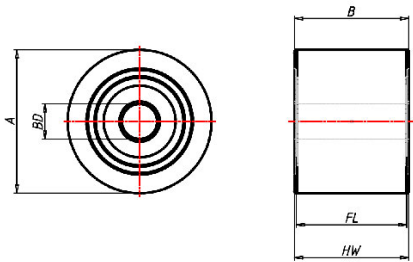
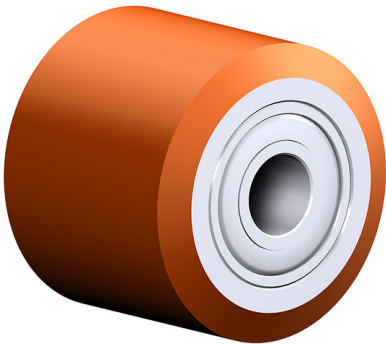

floor protective


weather proof

Wheel

Cast polyurethane coating, 95±3 Shore A

Steel wheel centre



Wheel	Wheel-Ø A x width B mm: 80x50
Load Capacity kg:	460
Load capacity tested according to EN 12530 and EN 12527	
Hub width mm:	50
Fixing length mm:	46
Wheel bearing:	2 Ball bearings 6005 ZZ
Bore diameter mm:	25

Advantages

- ✓ silent in motion
- ✓ low rolling resistance
- ✓ high abrasion and tear resistance
- ✓ high resistance to shocks
- ✓ high chemical resistance

©Copyright 2024 Rollenbau GmbH, www.rollenbau.at 17.05.2024

Applications

– Fork-lifts