Swivel castor with wheel brake 541 M10 100 PUEL

Furniture Castors Series 540 GW - Wheel PUEL

-20 °C - +60 °C



Wheel

coated in polyurethane, 90±3 Shore Aelecrically conductive ${<}10^4\Omega$

High quality nylon wheel centre

Zinc-die-cast housing - chrome plated Swivel bearing with combined plain-ball bearing Wheel brake - glass fibre reinforced Wheel axle revited

Swivel castor with wheel	Wheel-⊘ A x width B mm: 100x13+13
brake	
Load Capacity kg:	70
Load capacity tested according to EN 12530 and EN 12527	
Overall height H mm:	124
Threat mm:	M10x15
Swivel radius SR mm:	116
Wheel bearing:	Nylon plain bearing


Advantages

- electrically conductive
- silent in motion
- low rolling resistance
- non-marking
- $\ensuremath{\overline{\square}}$ high resistance to shocks
- good chemical resistance

©Copyright 2024 Rollenbau GmbH, www.rollenbau.at 20.05.2024

⊙|ROLLENBAU



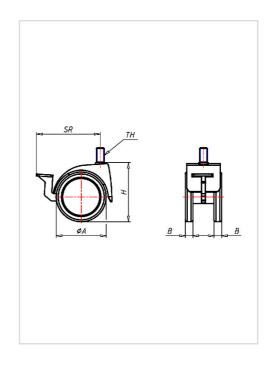

Applications

- Health-Professionals