Product data sheet

# Swivel castor 540 M10 50 PUEL

Furniture Castors Series 540 GW - Wheel PUEL

### -20 °C - +60 °C



#### Wheel

coated in polyurethane, 90±3 Shore Aelecrically conductive  ${<}10^4\Omega$ 

High quality nylon wheel centre

Zinc-die-cast housing - chrome plated Swivel bearing with combined plain-ball bearing Wheel brake - glass fibre reinforced Wheel axle revited


| Swivel castor   | Wheel- $\varnothing$ A x width B mm: 52x8+8 |
|---|---|
| Load Capacity kg:                                       | 40  |
| Load capacity tested according to EN 12530 and EN 12527 |   |
| Overall height H mm:                                    | 62  |
| Threat mm:  | M10x15                                      |
| Swivel radius SR mm:                                    | 52  |
| Wheel bearing:  | Nylon plain bearing                         |
| Wheel bearing:  | Nylon plain bearing                         |

#### Advantages

- electrically conductive
- silent in motion
- Iow rolling resistance
- non-marking
- high resistance to shocks
- good chemical resistance
- ©Copyright 2024 Rollenbau GmbH, www.rollenbau.at 20.05.2024

## O | ROLLENBAU



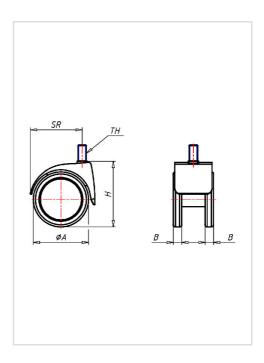

#### Applications

- Health-Professionals