Product data sheet

Swivel castor 540 M8 50 PUEL

Furniture Castors Series 540 GW - Wheel PUEL

-20 °C - +60 °C



Wheel

coated in polyurethane, 90±3 Shore Aelecrically conductive ${<}10^4\Omega$

High quality nylon wheel centre

Zinc-die-cast housing - chrome plated Swivel bearing with combined plain-ball bearing Wheel brake - glass fibre reinforced Wheel axle revited


Swivel castor	Wheel- \varnothing A x width B mm: 52x8+8
Load Capacity kg:	40
Load capacity tested according to EN 12530 and EN 12527	
Overall height H mm:	62
Threat mm:	M8x15
Swivel radius SR mm:	52
Wheel bearing:	Nylon plain bearing

Advantages

- electrically conductive
- silent in motion
- Iow rolling resistance
- non-marking
- high resistance to shocks
- good chemical resistance
- ©Copyright 2024 Rollenbau GmbH, www.rollenbau.at 20.05.2024

O | ROLLENBAU



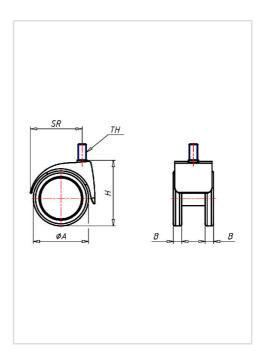

Applications

- Health-Professionals