

# Fixed castor CDF 125 AL

Transport Series CD - Wheel AL



-30 °C - +80 °C

++●

swivels easily

++●

wear resistant

++●


shock proof

++●

floor protective

++●

weather proof

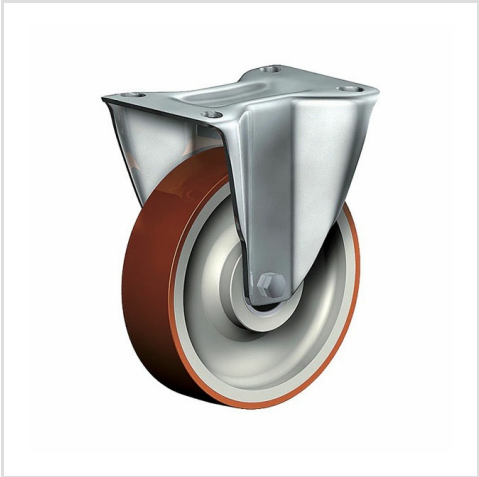


Wheel

Coated in injected polyurethane, 58±3 Shore D  
High quality nylon wheel centre

Fork



Finish: electro-zinc plated, double ball bearing – revited, hardened steel balls thermoplastic dust protection ring, wheel axle bolted, total lock

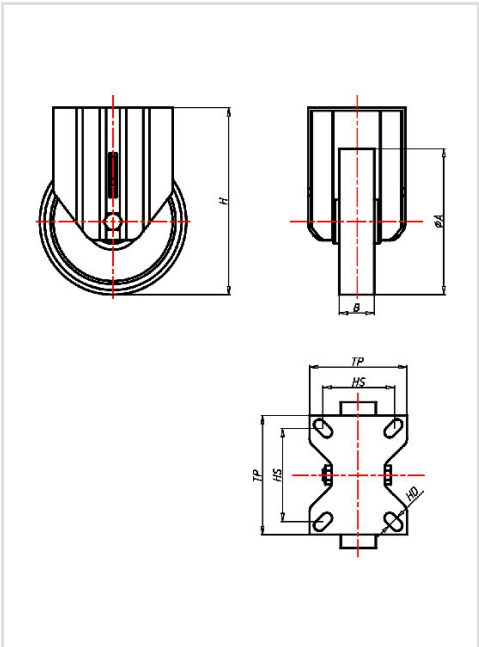

|                                                         |                                |
|---------------------------------------------------------|--------------------------------|
| Fixed castor                                            | Wheel-Ø A x width B mm: 125x30 |
| Load Capacity kg:                                       | 120                            |
| Load capacity tested according to EN 12530 and EN 12527 |                                |
| Overall height H mm:                                    | 154                            |
| Dimension of top plate TP mm:                           | 102x83                         |
| Hole spacing HS mm:                                     | 80x60                          |
| Hole-Ø HD mm:                                           | 9                              |
| Wheel bearing:                                          | Nylon plain bearing            |

Advantages

- ✓ low rolling resistance
- ✓ high abrasion and tear resistance
- ✓ easy to clean
- ✓ good chemical resistance

Applications

- Metal-Technology
- Workshops
- Ingredient containers
- Dollies
- Carpentry
- Building-Industry