

Fixed castor CSF 160 EK

Transport Series CD - Wheel E

 -20 °C - +70 °C

 **swivels easily**

 **wear resistant**

 **shock proof**

 **floor protective**

 **weather proof**

Wheel



Tread: Elastic solid rubber tyre, black, 73±5 Shore A, vulcanised on wheel centre

Wheel centre: Die-cast aluminium alloy

Fork



Finish: electro-zinc plated, double ball bearing – revited, hardened steel balls thermoplastic dust protection ring, wheel axle bolted, total lock

Fixed castor	Wheel-Ø A x width B mm: 160x50
--------------	--------------------------------

Load Capacity kg:	300
-------------------	-----

Load capacity tested according to EN 12530 and EN 12527	
---	--

Overall height H mm:	196
----------------------	-----

Dimension of top plate TP mm:	135x110
-------------------------------	---------

Hole spacing HS mm:	105x80
---------------------	--------

Hole-Ø HD mm:	11
---------------	----


Wheel bearing:	Ball bearing
----------------	--------------

Advantages

- ✓ excellent running performance
- ✓ very silent in motion
- ✓ low rolling resistance
- ✓ good abrasion resistance
- ✓ corrosion resistant
- ✓ non-marking in grey

©Copyright 2024 Rollenbau GmbH, www.rollenbau.at 20.05.2024

 **ROLLENBAU**

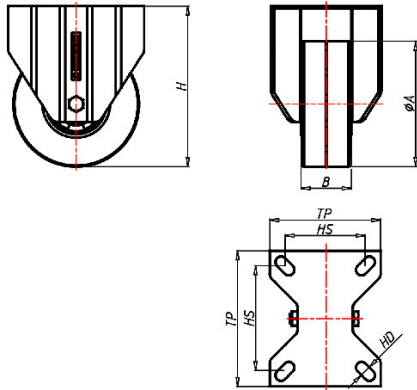

Applications

- Bins
- Refuse bins
- Dollies
- Trash containers
- Refuse containers