

# Swivel castor with total lock CDT 100 AL

Transport Series CD - Wheel AL

-30 °C - +80 °C

+++  
swivels easily

+++  
wear resistant

+++  
shock proof

+++  
floor protective

+++  
weather proof

## Wheel

Coated in injected polyurethane, 58±3 Shore D

High quality nylon wheel centre

## Fork



Finish: electro-zinc plated, double ball bearing – revited, hardened steel balls thermoplastic dust protection ring, wheel axle bolted, total lock

Swivel castor with total lock Wheel-Ø A x width B mm: 100x30

Load Capacity kg: 120

Load capacity tested according to EN 12530 and EN 12527

Overall height H mm: 128

Dimension of top plate TP 102x83 mm:

Hole spacing HS mm: 80x60

Hole-Ø HD mm: 9

Swivel radius SR mm: 108


Wheel bearing: Nylon plain bearing

## Advantages

- ✓ low rolling resistance
- ✓ high abrasion and tear resistance
- ✓ easy to clean
- ✓ good chemical resistance

©Copyright 2024 Rollenbau GmbH, www.rollenbau.at 20.05.2024

ROLLENBAU

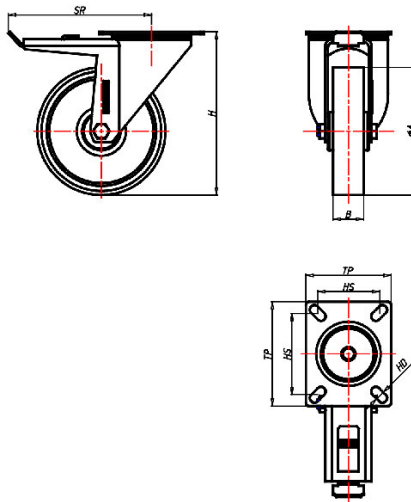

## Applications

- Metal-Technology
- Workshops
- Ingredient containers
- Dollies
- Carpentry
- Building-Industry