

Swivel castor with total lock CDT 125 TLK

Transport Series CD - Wheel TL

 -30 °C - +80 °C

 **swivels easily**

 **wear resistant**

 **shock proof**

 **floor protective**

 **weather proof**

Wheel



Tread: cast polyurethane, 95±3 Shore A

Core: De-cast aluminium alloy

Fork



Finish: electro-zinc plated, double ball bearing – revited, hardened steel balls thermoplastic dust protection ring, wheel axle bolted, total lock

Swivel castor with total lock Wheel-Ø A x width B mm: 125x30

Load Capacity kg: 120

Load capacity tested according to EN 12530 and EN 12527

Overall height H mm: 154

Dimension of top plate TP 102x83 mm:

Hole spacing HS mm: 80x60

Hole-Ø HD mm: 9

Swivel radius SR mm: 108


Wheel bearing: Ball bearing

Advantages

- ✓ silent in motion
- ✓ low rolling resistance
- ✓ high abrasion and tear resistance
- ✓ high resistance to shocks
- ✓ good chemical resistance

©Copyright 2024 Rollenbau GmbH, www.rollenbau.at 20.05.2024

 **ROLLENBAU**

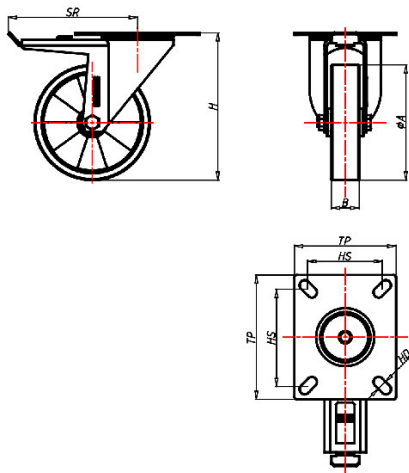

Applications

- Metal-Technology
- Workshops
- Dollies
- Carpentry
- Building-Industry