

Swivel castor with total lock CSST 125 ALB

Transport Series CD - Wheel AL

 -30 °C - +80 °C

 **swivels easily**

 **wear resistant**

 **shock proof**

 **floor protective**

 **weather proof**

Wheel

Coated in injected polyurethane, 58±3 Shore D

High quality nylon wheel centre

Fork



Finish: electro-zinc plated, double ball bearing – revited, hardened steel balls thermoplastic dust protection ring, wheel axle bolted, total lock

Swivel castor with total lock Wheel-Ø A x width B mm: 125x30

Load Capacity kg: 200

Load capacity tested according to EN 12530 and EN 12527

Overall height H mm: 160

Dimension of top plate TP 135x110 mm:

Hole spacing HS mm: 105x80

Hole-Ø HD mm: 11

Swivel radius SR mm: 140


Wheel bearing: Roller bearing

Advantages

- ✓ low rolling resistance
- ✓ high abrasion and tear resistance
- ✓ easy to clean
- ✓ good chemical resistance

©Copyright 2024 Rollenbau GmbH, www.rollenbau.at 20.05.2024

 **ROLLENBAU**

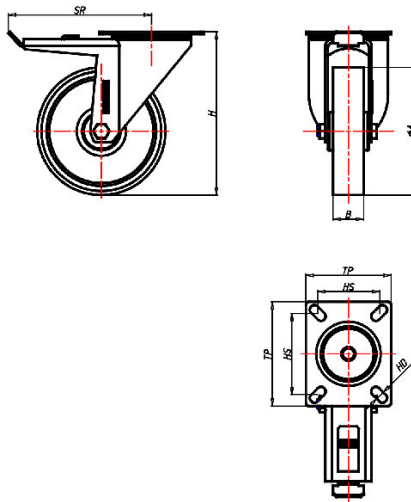

Applications

- Metal-Technology
- Workshops
- Ingredient containers
- Dollies
- Carpentry
- Building-Industry