

# Swivel castor CD 175 TLB

Transport Series CD - Wheel TL

-30 °C - +80 °C

++

swivels easily

+++

wear resistant

++

shock proof

+++

floor protective

++

weather proof

Wheel



Tread: cast polyurethane, 95±3 Shore A

Core: De-cast aluminium alloy

Fork




Finish: electro-zinc plated, double ball bearing – revited, hardened steel balls thermoplastic dust protection ring, wheel axle bolted, total lock

|                                                         |                                |
|---------------------------------------------------------|--------------------------------|
| Swivel castor                                           | Wheel-Ø A x width B mm: 175x40 |
| Load Capacity kg:                                       | 300                            |
| Load capacity tested according to EN 12530 and EN 12527 |                                |
| Overall height H mm:                                    | 216                            |
| Dimension of top plate TP mm:                           | 135x110                        |
| Hole spacing HS mm:                                     | 105x80                         |
| Hole-Ø HD mm:                                           | 11                             |
| Swivel radius SR mm:                                    | 146                            |
| Wheel bearing:                                          | Roller bearing                 |

Advantages

- ✓ silent in motion
- ✓ low rolling resistance
- ✓ high abrasion and tear resistance
- ✓ high resistance to shocks
- ✓ good chemical resistance

©Copyright 2024 Rollenbau GmbH, www.rollenbau.at 20.05.2024

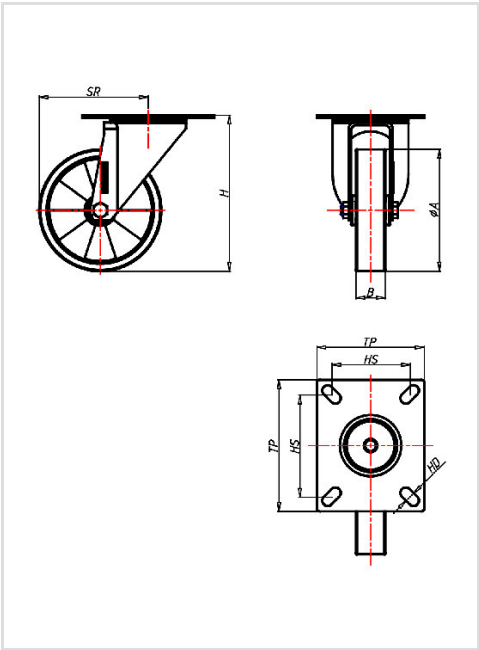

Applications

- Metal-Technology
- Workshops
- Dollies
- Carpentry
- Building-Industry