

# Swivel castor CD 180 EB

Transport Series CD - Wheel E

 -20 °C - +70 °C

 **swivels easily**

 **wear resistant**

 **shock proof**

 **floor protective**

 **weather proof**

## Wheel



Tread: Elastic solid rubber tyre, black, 73±5 Shore A, vulcanised on wheel centre

Wheel centre: Die-cast aluminium alloy

## Fork




Finish: electro-zinc plated, double ball bearing – revited, hardened steel balls thermoplastic dust protection ring, wheel axle bolted, total lock

|                                                         |                                |
|---------------------------------------------------------|--------------------------------|
| Swivel castor                                           | Wheel-Ø A x width B mm: 180x50 |
| Load Capacity kg:                                       | 300                            |
| Load capacity tested according to EN 12530 and EN 12527 |                                |
| Overall height H mm:                                    | 218                            |
| Dimension of top plate TP mm:                           | 135x110                        |
| Hole spacing HS mm:                                     | 105x80                         |
| Hole-Ø HD mm:                                           | 11                             |
| Swivel radius SR mm:                                    | 149                            |
| Wheel bearing:                                          | Roller bearing                 |

## Advantages

- ✓ excellent running performance
- ✓ very silent in motion
- ✓ low rolling resistance
- ✓ good abrasion resistance
- ✓ corrosion resistant
- ✓ non-marking in grey

©Copyright 2024 Rollenbau GmbH, [www.rollenbau.at](http://www.rollenbau.at) 20.05.2024

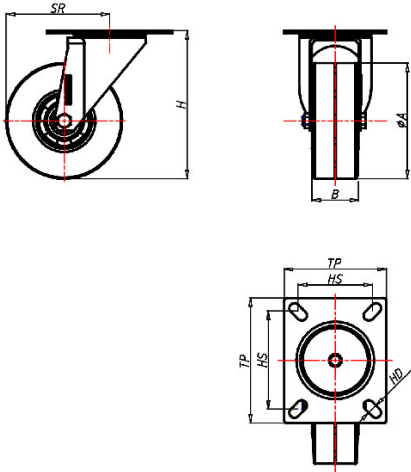

## Applications

- Bins
- Refuse bins
- Dollies
- Trash containers
- Refuse containers