

Swivel castor CSS 125 AL

Transport Series CD - Wheel AL

-30 °C - +80 °C

++
swivels easily

++
wear resistant

++
shock proof

++
floor protective

++
weather proof

Wheel

Coated in injected polyurethane, 58±3 Shore D

High quality nylon wheel centre

Fork




Finish: electro-zinc plated, double ball bearing – revited, hardened steel balls thermoplastic dust protection ring, wheel axle bolted, total lock

Swivel castor	Wheel-Ø A x width B mm: 125x30
Load Capacity kg:	200
Load capacity tested according to EN 12530 and EN 12527	
Overall height H mm:	160
Dimension of top plate TP mm:	135x110
Hole spacing HS mm:	105x80
Hole-Ø HD mm:	11
Swivel radius SR mm:	113
Wheel bearing:	Nylon plain bearing

Advantages

- ✓ low rolling resistance
- ✓ high abrasion and tear resistance
- ✓ easy to clean
- ✓ good chemical resistance

©Copyright 2024 Rollenbau GmbH, www.rollenbau.at 20.05.2024

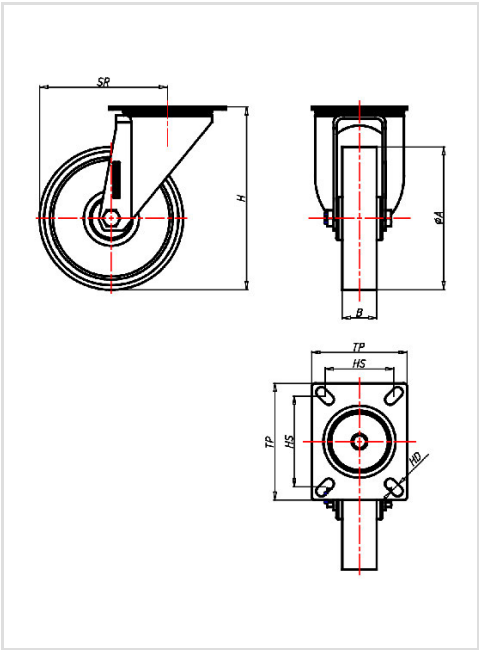

Applications

- Metal-Technology
- Workshops
- Ingredient containers
- Dollies
- Carpentry
- Building-Industry