

Swivel castor CSS 125 TLSK

Transport Series CD - Wheel TLS

-20 °C - +80 °C

++

swivels easily

+++

wear resistant

++

shock proof

+++

floor protective

++

weather proof

Wheel



Tread: cast polyurethane, 70±3 Shore A

Core: Die-cast aluminium alloy

Fork




Finish: electro-zinc plated, double ball bearing – revited, hardened steel balls thermoplastic dust protection ring, wheel axle bolted, total lock

Swivel castor	Wheel-Ø A x width B mm: 125x50
Load Capacity kg:	200
Load capacity tested according to EN 12530 and EN 12527	
Overall height H mm:	160
Dimension of top plate TP mm:	135x110
Hole spacing HS mm:	105x80
Hole-Ø HD mm:	12.5
Swivel radius SR mm:	114
Wheel bearing:	Ball bearing

Advantages

- ✓ very silent in motion
- ✓ low rolling resistance
- ✓ high abrasion and tear resistance
- ✓ high resistance to shocks
- ✓ easy to clean
- ✓ good chemical resistance

©Copyright 2024 Rollenbau GmbH, www.rollenbau.at 20.05.2024

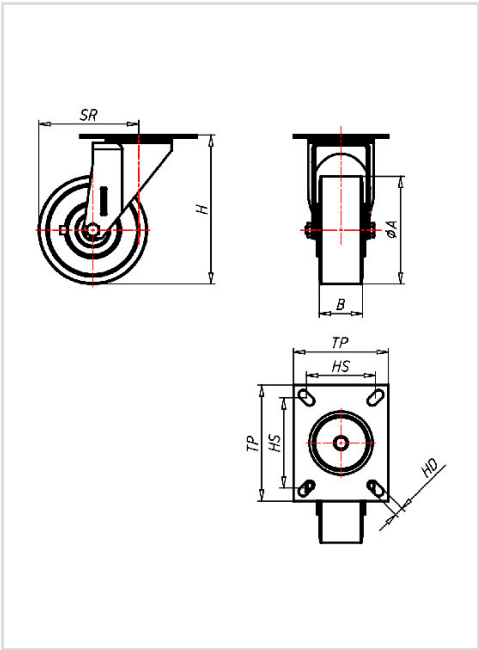

Applications

- Metal-Technology
- Workshops
- Dollies
- Carpentry
- Building-Industry