


Swivel castor with total lock KDT 160

ELK 

Transport Series KD - Wheel EL

 -20 °C - +60 °C+++
swivels easily+++
wear resistant+++
shock proof+++
floor protective+++
weather proof

Wheel

rubber tyre, electricallyconductive, volume resistance value $<10^4\Omega$ bolted steel rim zinc plated, volume resistance value $<10^4\Omega$

Fork



Finish: electro-zinc plated, hardened steel balls, double ball race swivel head – pressed steel sheet, with strong Kingpin bolted and locked – adjustable, thermoplastic dust protection ring and seal, wheel axle bolted, adjustable total lock – leading or trailing available

Swivel castor with total lock Wheel- \varnothing A x width B mm: 160x40

Load Capacity kg: 135

Load capacity tested according to EN 12530 and EN 12527

Overall height H mm: 199

Dimension of top plate TP 135x110 mm:

Hole spacing HS mm: 105x80

Hole- \varnothing HD mm: 10,5

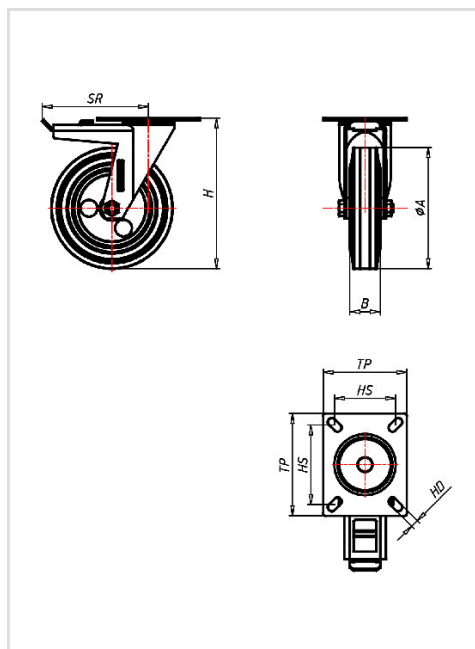
Swivel radius SR mm: 140

Wheel bearing: Ball bearing

Advantages

- ✓ electrically conductive
- ✓ silent in motion
- ✓ good running performance
- ✓ resistant to diluted acids

©Copyright 2024 Rollenbau GmbH, www.rollenbau.at 20.05.2024

 ROLLENBAU

Applications

- Trash container trucks
- Dollies