

# Swivel castor KD 100 ELB⚡

Transport Series KD - Wheel EL

🌡️ -20 °C - +60 °C

+++  
swivels easily

+++  
wear resistant

+++  
shock proof

+++  
floor protective

+++  
weather proof

## Wheel



rubber tyre, electricallyconductive, volume resistance value <10<sup>4</sup>Ω

bolted steel rim zinc plated, volume resistance value <10<sup>4</sup>Ω

## Fork




Finish: electro-zinc plated, hardened steel balls, double ball race swivel head – pressed steel sheet, with strong Kingpin bolted and locked – adjustable, thermoplastic dust protection ring and seal, wheel axle bolted, adjustable total lock – leading or trailing available

Swivel castor	Wheel-Ø A x width B mm: 100x30
Load Capacity kg:	70
Load capacity tested according to EN 12530 and EN 12527	
Overall height H mm:	137
Dimension of top plate TP	105x85
mm:	
Hole spacing HS mm:	80x60
Hole-Ø HD mm:	8,5
Swivel radius SR mm:	93
Wheel bearing:	Roller bearing

## Advantages

- ✔ electrically conductive
- ✔ silent in motion
- ✔ good running performance
- ✔ resistant to diluted acids

©Copyright 2024 Rollenbau GmbH, www.rollenbau.at 20.05.2024

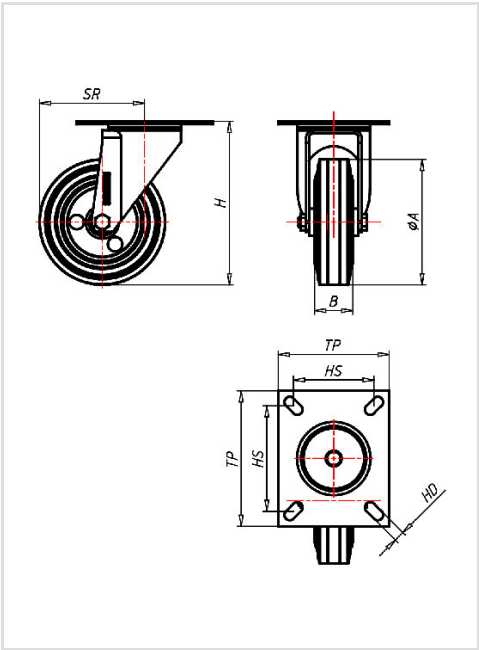

## Applications

- Trash container trucks
- Dollies