

Swivel castor KD 125 ELB⚡

Transport Series KD - Wheel EL

🌡️ -20 °C - +60 °C

++
swivels easily

++
wear resistant

+++
shock proof

+++
floor protective

++
weather proof

Wheel



rubber tyre, electricallyconductive, volume resistance value $<10^4\Omega$

bolted steel rim zinc plated, volume resistance value $<10^4\Omega$

Fork




Finish: electro-zinc plated, hardened steel balls, double ball race swivel head – pressed steel sheet, with strong Kingpin bolted and locked – adjustable, thermoplastic dust protection ring and seal, wheel axle bolted, adjustable total lock – leading or trailing available

Swivel castor	Wheel-Ø A x width B mm: 125x38
Load Capacity kg:	100
Load capacity tested according to EN 12530 and EN 12527	
Overall height H mm:	163
Dimension of top plate TP mm:	135x110
Hole spacing HS mm:	105x80
Hole-Ø HD mm:	10,5
Swivel radius SR mm:	106
Wheel bearing:	Roller bearing

Advantages

- ✔ electrically conductive
- ✔ silent in motion
- ✔ good running performance
- ✔ resistant to diluted acids

©Copyright 2024 Rollenbau GmbH, www.rollenbau.at 20.05.2024

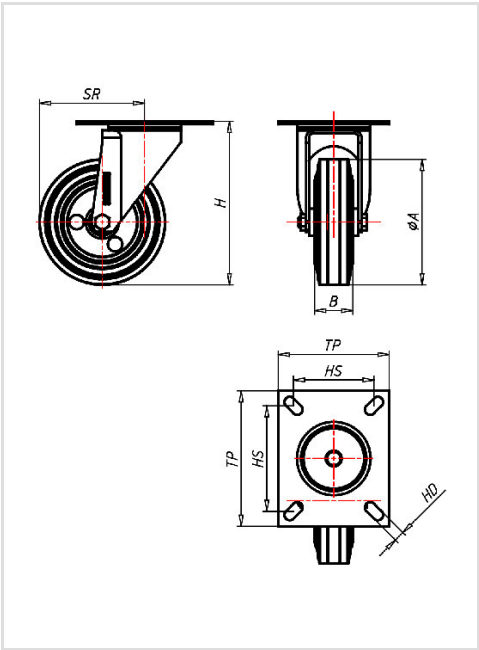

Applications

- Trash container trucks
- Dollies