


Wheel 100 GKL 8

Wheels Series G

 -20 °C - +60 °C


swivels easily


wear resistant


shock proof


floor protective


weather proof

Wheel

Standard rubber tyre grey


Nylon rim

| | |
|---|--------------------------------|
| Wheel | Wheel-Ø A x width B mm: 100x24 |
| Load Capacity kg: | 70 |
| Load capacity tested according to EN 12530 and EN 12527 | |
| Hub width mm: | 29 |
| Fixing length mm: | 29 |
| Wheel bearing: | 2 Cone bearings |
| Bore diameter mm: | 8 |

Advantages

- ✓ non-marking - floor protective
- ✓ silent in motion
- ✓ good running performance
- ✓ resistant to diluted acids

©Copyright 2024 Rollenbau GmbH, www.rollenbau.at 16.05.2024

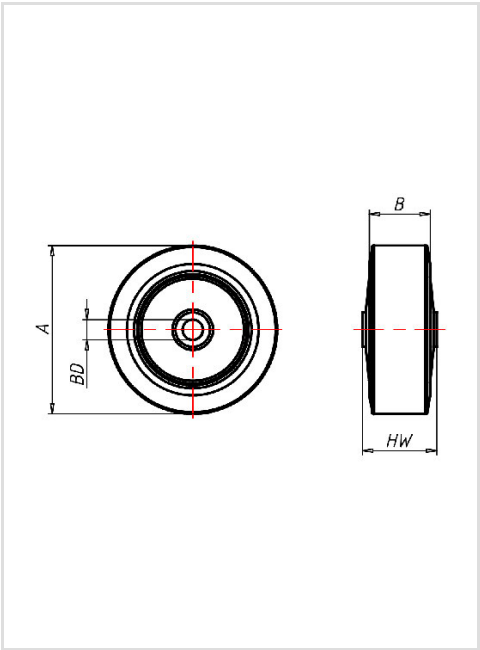

Applications

- Bins
- Refuse bins
- Trash containers
- Refuse containers