

# Wheel 75 GKL 6

Wheels Series G

 -20 °C - +60 °C

  
swivels easily

  
wear resistant

  
shock proof

  
floor protective

  
weather proof

## Wheel

Standard rubber tyre grey


Nylon rim

|                                                         |                               |
|---------------------------------------------------------|-------------------------------|
| Wheel                                                   | Wheel-Ø A x width B mm: 75x25 |
| Load Capacity kg:                                       | 60                            |
| Load capacity tested according to EN 12530 and EN 12527 |                               |
| Hub width mm:                                           | 29                            |
| Fixing length mm:                                       | 29                            |
| Wheel bearing:                                          | 2 Cone bearings               |
| Bore diameter mm:                                       | 6                             |

## Advantages

- ✓ non-marking - floor protective
- ✓ silent in motion
- ✓ good running performance
- ✓ resistant to diluted acids

©Copyright 2024 Rollenbau GmbH, [www.rollenbau.at](http://www.rollenbau.at) 16.05.2024

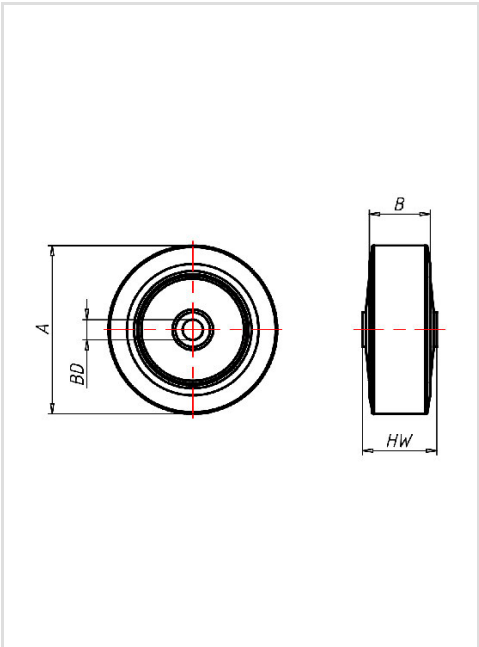

## Applications

- Bins
- Refuse bins
- Trash containers
- Refuse containers