

# Swivel castor EDD 200 ZZK

Extra Heavy Duty Series EDD - Wheel Z

-30 °C - +80 °C

+++  
swivels easily

+++  
wear resistant

+++  
shock proof

+++  
floor protective

+++  
weather proof

## Wheel



Tread: Cast polyurethane, 95±3 Shore A

Wheel centre, Cast-iron - painted

## Fork





For applications where a super strong and durable caster is required,  
one tapered roller and one axial ball bearing,  
dust protection ring,  
very strong integrated Kingpin,  
locked nut, grease nipple, wheel axle bolted,  
finish – painted

|                                                         |                                   |
|---------------------------------------------------------|-----------------------------------|
| Swivel castor                                           | Wheel-Ø A x width B mm: 200x50+50 |
| Load Capacity kg:                                       | 2000                              |
| Load capacity tested according to EN 12530 and EN 12527 |                                   |
| Overall height H mm:                                    | 270                               |
| Dimension of top plate TP mm:                           | 255x205                           |
| Hole spacing HS mm:                                     | 210x160                           |
| Hole-Ø HD mm:                                           | 17                                |
| Swivel radius SR mm:                                    | 177                               |
| Wheel bearing:                                          | Ball bearing                      |

## Advantages

- ✓ silent in motion
- ✓ low rolling resistance
- ✓ high abrasion and tear resistance
- ✓ high resistance to shocks
- ✓ good chemical resistance

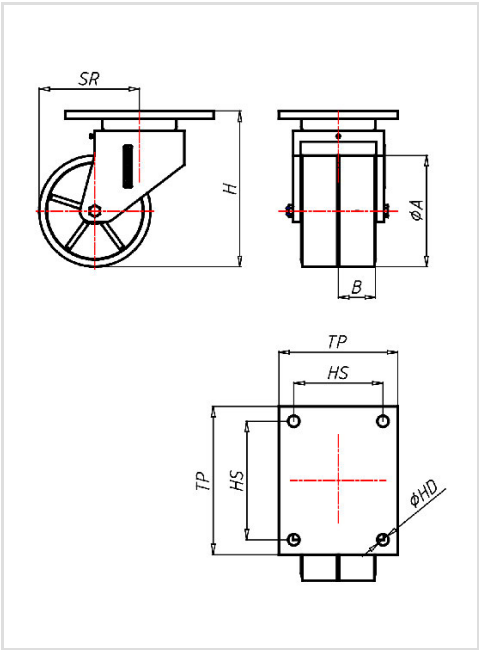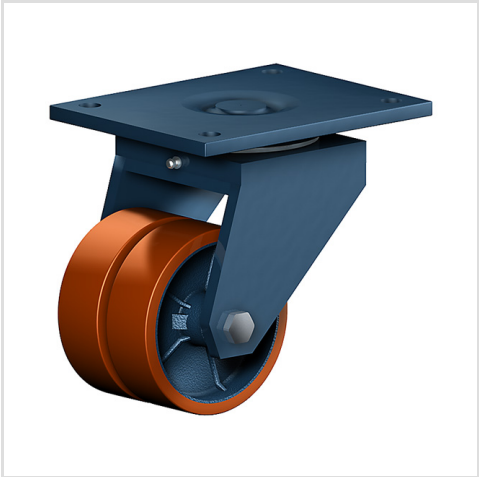

## Applications

- Metal-Technology
- Heavy duty dollies
- Trash container trucks
- Machinery moving dollies
- Workshops
- Racks
- Building-Industry