

Ball Units Series A7 S/3



 max 2000 kg  -30 °C - +100 °C

Material


- Ball: carbon steel or stainless steel
- Units are machined using CNC machines from one piece of steel
- Hevi-Load units run on the re-circulating ball principle
- The load ball rotates on a hardened bed of small balls

Advantages

- ✓ Casing made of solid steel on the lathe
- ✓ units run on the re-circulating ball principle
- ✓ The load ball rotates on a hardened bed of small balls
- ✓ plate with four fixing holes

Applications

- Haulage way
- Assembly lines

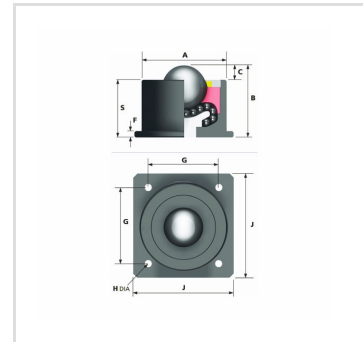

SERIES 3

Dimensions

ARTICLE NUMBER	ARTICEL TYPE	SERIES	BALL-Ø MM	FINISH HOUSING	FINISH BALLS	LOAD CAPACITY KG	A MM	B MM	C MM	E MM	F MM	G MM	H MM	MOUNTING HOLES	J MM	S MM	PRICE €
A7103-13	Ball Transfer Unit	3	12,7	steel	carbon- steel	35	23,8	22,6	3,5		3,2	34,8	3,6	2	44,5	19,1	100,56
A7103-16	Ball Transfer Unit	3	12,7	steel	stainless steel	35	23,8	22,6	3,5		3,2	34,8	3,6	2	44,5	19,1	120,84
A7122-13	Ball Transfer Unit	3	25,4	steel	carbon- steel	135	44,5	41,4	5,6		4,8	44,5	5,6	4	57,2	35,8	202,20
A7122-16	Ball Transfer Unit	3	25,4	steel	stainless steel	135	44,5	41,4	5,6		4,8	44,5	5,6	4	57,2	35,8	228,84
A7123-13	Ball Transfer Unit	3	25,4	steel	carbon- steel	320	50,8	45,5	6,4		6,3	57,9	7,1	4	76,2	39,1	230,40
A7123-16	Ball Transfer Unit	3	25,4	steel	stainless steel	215	50,8	45,5	6,4		6,3	57,9	7,1	4	76,2	39,1	280,68
A7151-13	Ball Transfer Unit	3	38,1	steel	carbon- steel	1000	60	62,2	13		12,4	57,9	7,1	4	76,2	49,2	386,76
A7151-16	Ball Transfer Unit	3	38,1	steel	stainless steel	670	60	62,2	13		12,4	57,9	7,1	4	76,2	49,2	444,60
A7174-13	Ball Transfer Unit	3	50,8	steel	carbon- steel	2000	101,6	98,3	14,3		9,6	101,6	11	4	127	84	1156,92
A7174-16	Ball Transfer Unit	3	50,8	steel	stainless steel	1330	101,6	98,3	14,3		9,6	101,6	11	4	127	84	1368,96