

Extra Heavy Duty Series ED, Wheel TLBA

 max 775 kg  -20 °C - +80 °C  125-200 mm

+++
swivels easily

+++
wear resistant

+++
shock proof

+++
floor protective

+++
weather proof

Material



Tread: cast polyurethane, 95 ± 2 Shore A crowned
Core: Die-cast aluminium alloy

Material Fork



For applications where a super strong and durable caster is required,
one tapered roller and one axial ball bearing,
dust protection ring,
very strong integrated Kingpin,
locked nut, grease nipple, wheel axle bolted,
finish – painted

Advantages

- ✓ ergonomic running with crowned tread
- ✓ very silent in motion
- ✓ very low rolling resistance
- ✓ easy in revving
- ✓ high abrasion and tear resistance
- ✓ good chemical resistance

Applications

- Metal-Technology
- Heavy duty dollies
- Trash container trucks
- Machinery moving dollies
- Workshops
- Racks
- Building-Industry
- Carpentry






SWIVEL CASTOR



SWIVEL CASTOR WITH TOTAL LOCK

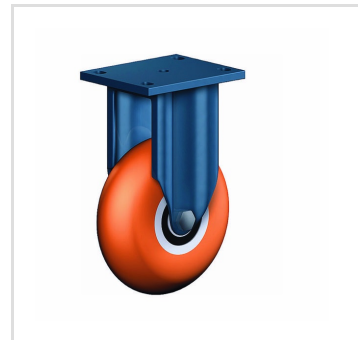

FIXED CASTOR

Dimensions

ARTICLE NUMBER	ARTICEL TYPE	WHEEL-Ø A X WIDTH B MM	LOAD CAPACITY KG	OVERALL HEIGHT H MM	DIMENSION OF TOP PLATE TP MM	HOLE SPACING HS MM	HOLE-Ø HD MM	SWIVEL RADIUS SR MM	WHEEL BEARING	PRICE €
ED 125 TLBAK	Swivel castor	125x50	450	172	135x110	105x80	11	115		221,28
EDF 125 TLBAK	Fixed castor	125x50	450	172	135x110	105x80	11			111,60
ED 151 TLBAK	Swivel castor	150x50	575	202	135x110	105x80	13	142		251,40
EDT 151 TLBAK	Swivel castor with total lock	150x50	575	202	135x110	105x80	13	150		296,40
EDF 151 TLBAK	Fixed castor	150x50	575	202	135x110	105x80	13			127,08
ED 200 TLBAK	Swivel castor	200x50	775	251	135x110	105x80	13	172		280,20
EDT 200 TLBAK	Swivel castor with total lock	200x50	775	251	135x110	105x80	13	172		325,32
EDF 200 TLBAK	Fixed castor	200x50	775	251	135x110	105x80	13			149,16